


1. VENT ROUTED TO SAFE LOCATION.
2. UPSTREAM STRAIGHT RUN MIN. 10xD. DOWNSTREAM STRAIGHT RUN MIN. 5xD.
3. CHEMICAL CLEANING (CIP); BLEED DRAIN CONNECTION.
4. PRIMARY SEAL GAS IS TAKEN DOWNSTREAM LAST COMPRESSING STAGE. SKID INTERNAL DESIGN.
5. MAX BACK-PRESSURE 0.005 BARG.
6. OIL CHANGE BY USING TEMPORARY ARRANGEMENT WITH HOSES.
7. INSULATION THICKNESS TO BE TAKEN INTO CONSIDERATION ON TW SELECTION.
8. SAFETY CRITICAL HEAT TRACING - HYDRATE MITIGATION (25 DEGC).
9. LL SET POINT IS OVERRIDEN AT START-UP.
10. DELETED.
11. DELETED.
12. FROM SEAL GAS SYSTEM RUPTURE DISCS.
13. DIFFERENTIAL PRESSURE BASED ORIFICE TYPE VOLUME FLOW METER.
14. SECONDARY SEAL GAS AND SEPARATION GAS.
15. HIGH POINT VENT AND LOW POINT DRAIN TO BE FINALIZED BY PIPING AS PER PIPING LAYOUT.
16. MANUAL DRAIN PRIOR TO EACH START-UP. PUSH BUTTON WITH PERMISSIVE FOR START-UP SEQUENCE.
17. PROVISION FOR FUTURE HOT GAS BYPASS LINE.
18. LUBE OIL RESERVOIR VENT. OIL MIST SEPARATOR INSTALLED OFF-SKID.
19. FLAME ARRESTER INCLUDES FLAME FILTER AND LOCATED AT END OF PIPE.
20. ATMOSPHERIC VENT.
21. THIS P&ID CONTAINS DCN-KP-0273-1.

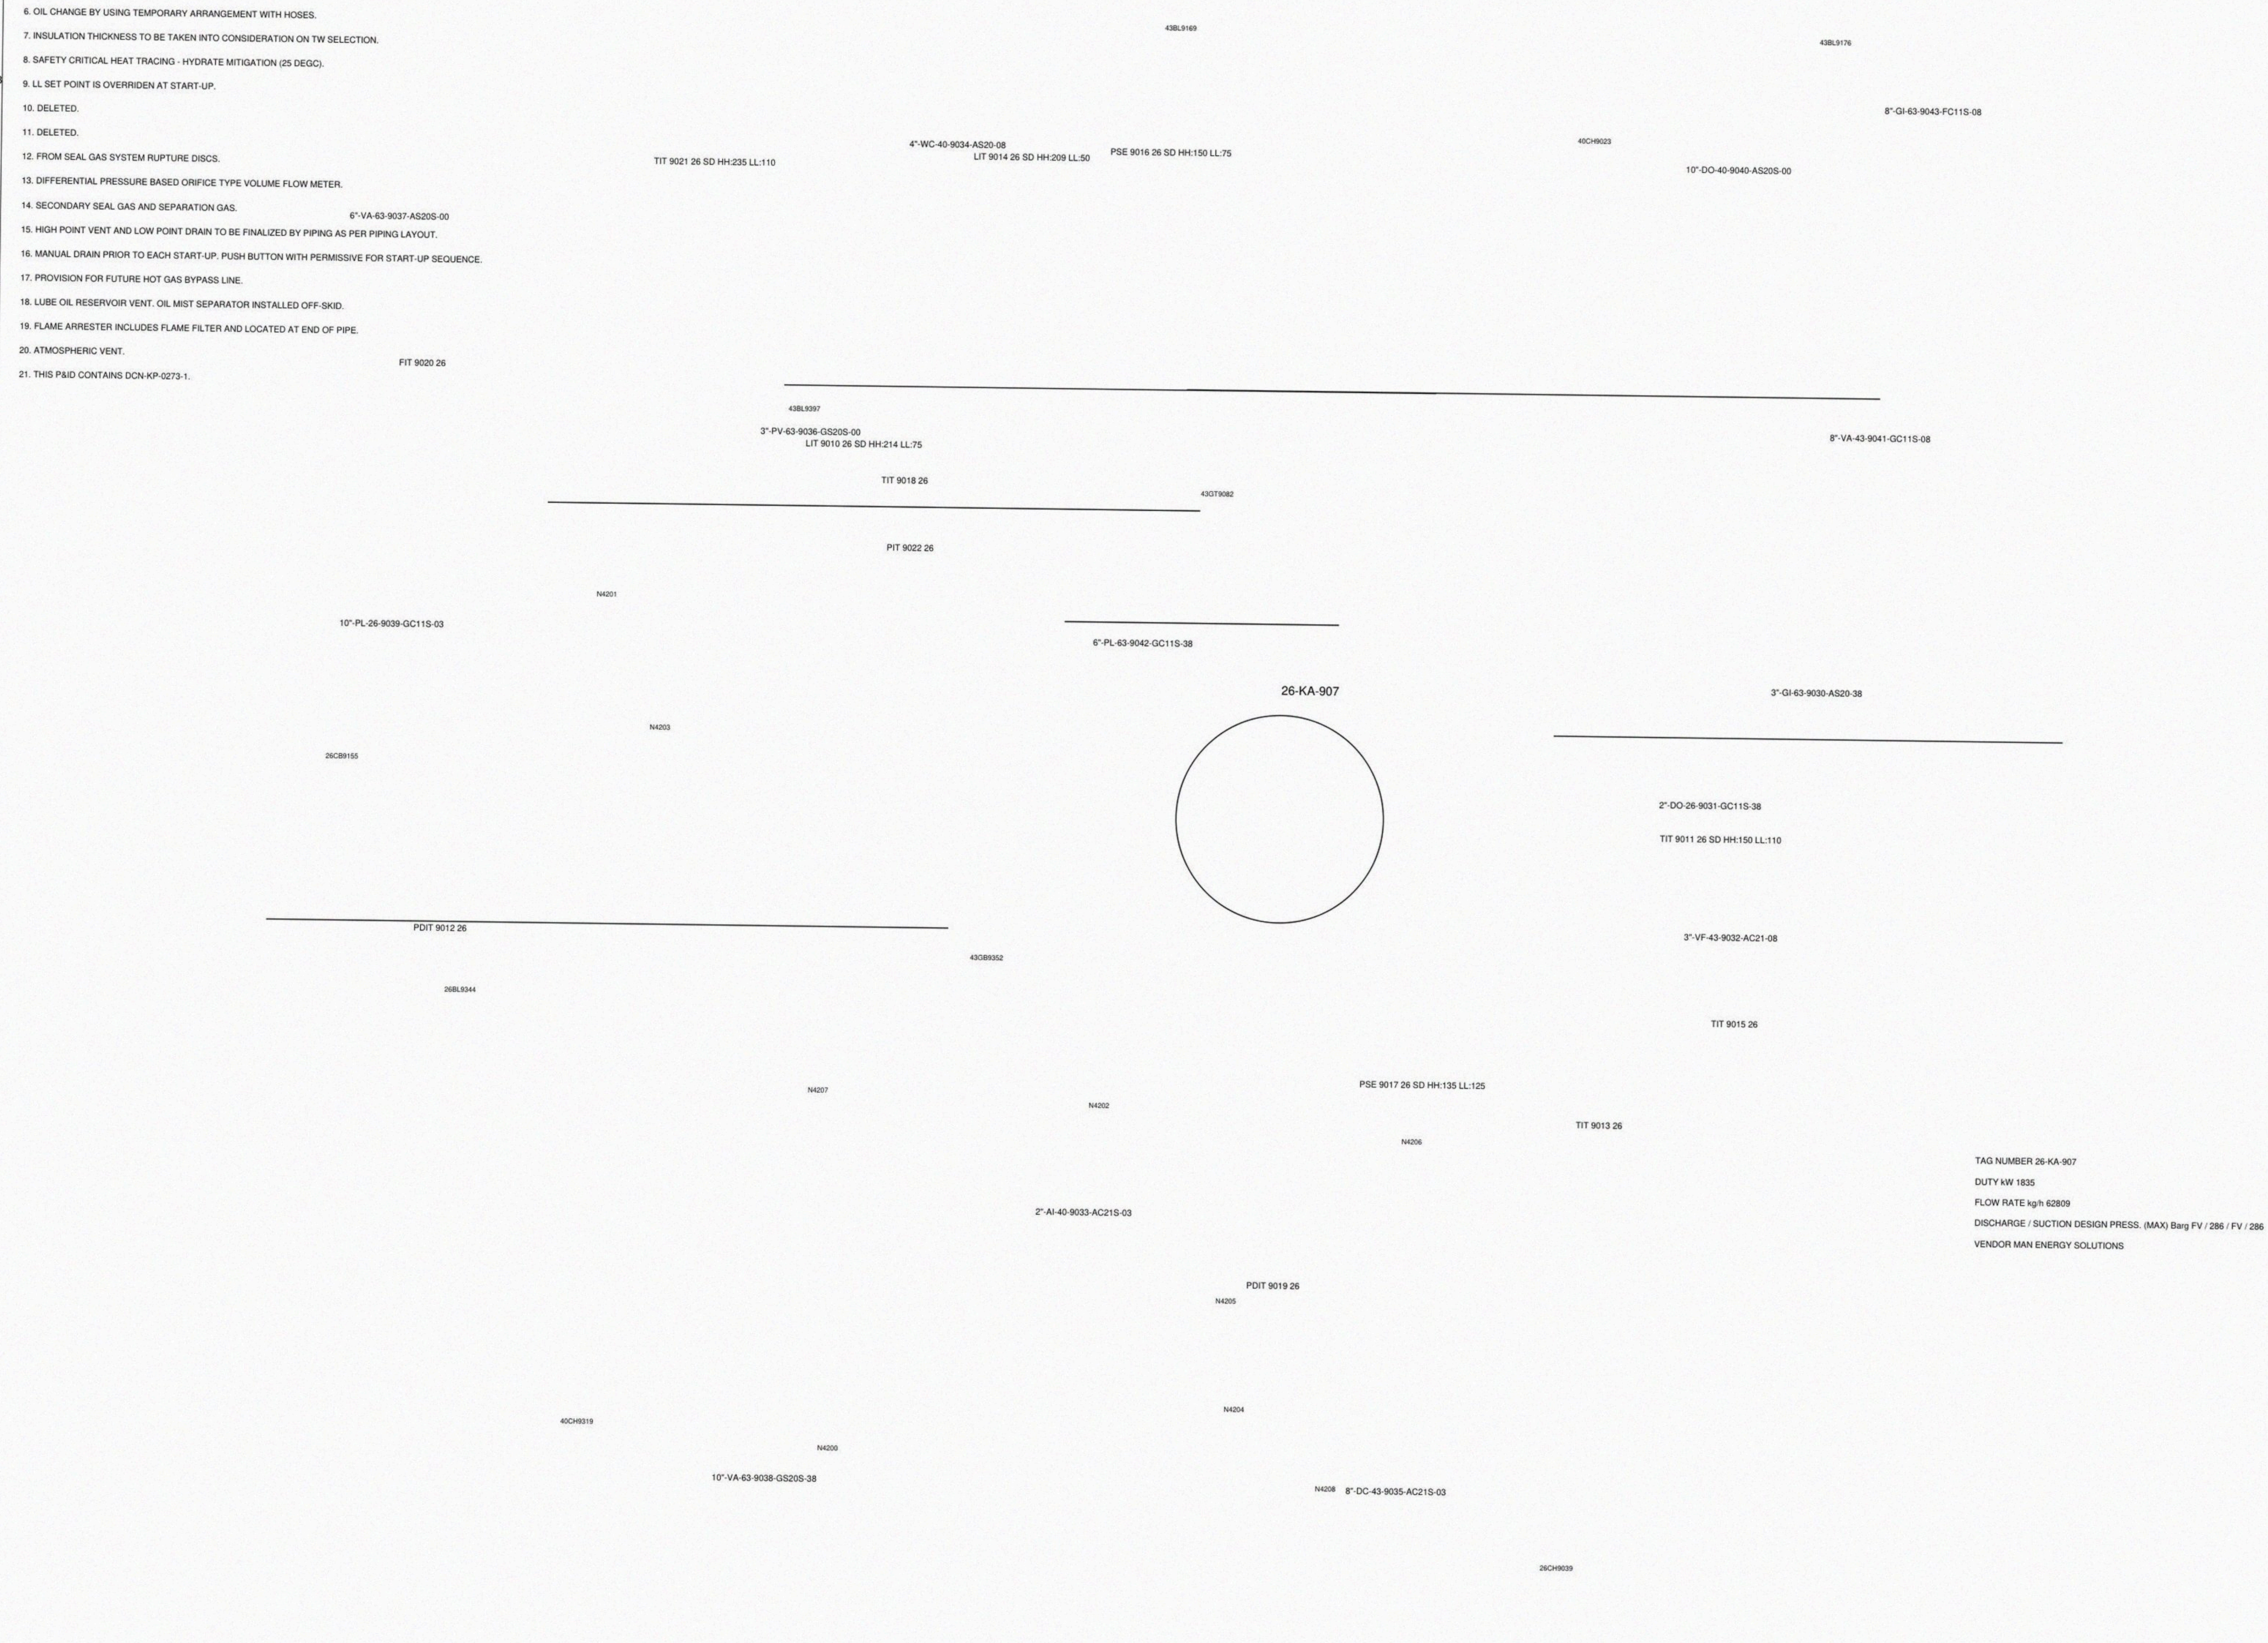

TAG NUMBER 26-KA-907
DUTY kW 1835
FLOW RATE kg/h 62809
DISCHARGE / SUCTION DESIGN PRESS. (MAX) Barg FV / 286 / FV / 286
VENDOR MAN ENERGY SOLUTIONS